


MST - (Insert Dim. B)
 Window/Door/Penetration Side Flashings

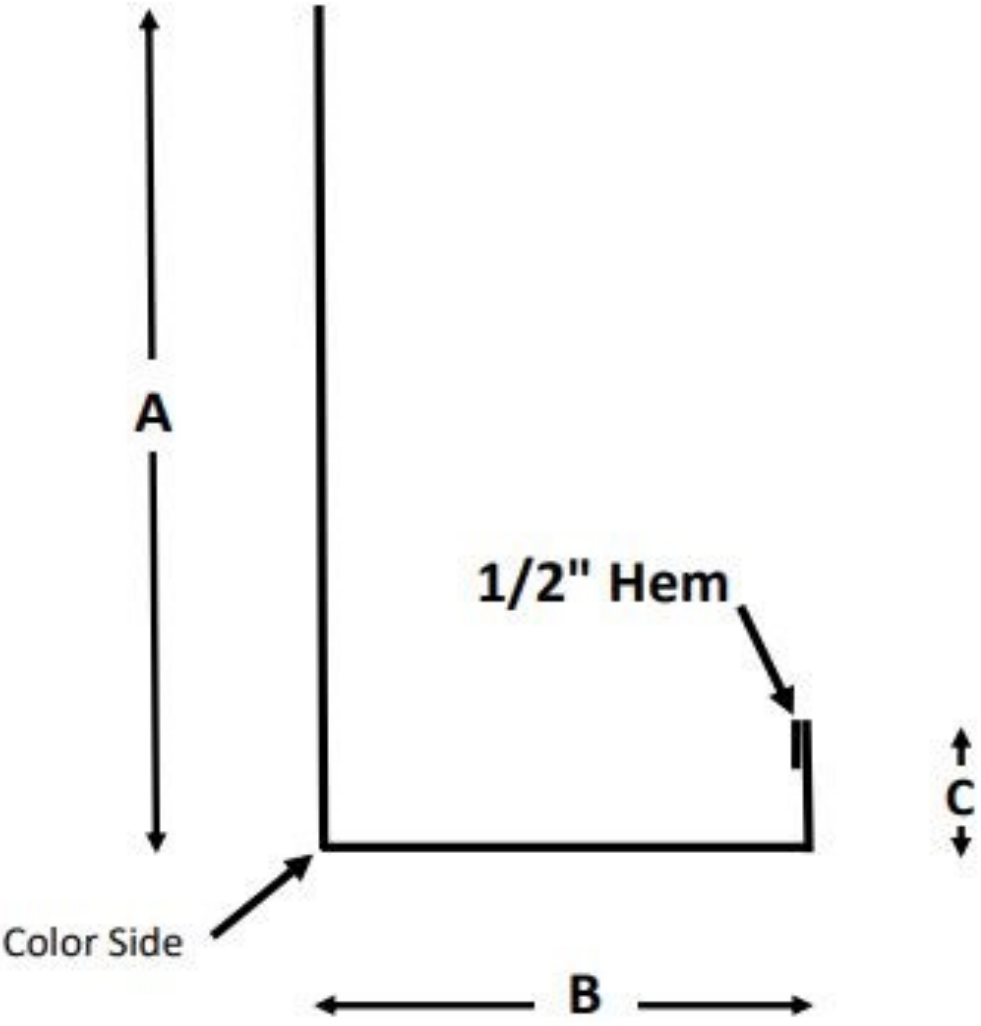


<u>Foam Thickness</u>	<u>Porcelain</u>	<u>"A"</u>	<u>"B"</u> <u>I.D.</u>	<u>"C"</u>	<u>Hem</u>
2"	8mm	4"	2.5	1"	1/2"
3"	8mm	3"	3.5	1"	1/2"
4"	8mm	3"	4.5	1"	1/2"

Flashing Material: Minimum 26 gauge galvanized, 0.030 Aluminum or 0.030 stainless steel as specified by the architect.

STT- (Insert Dim. B)

Stone Above the window/Door/Penetration Flashing

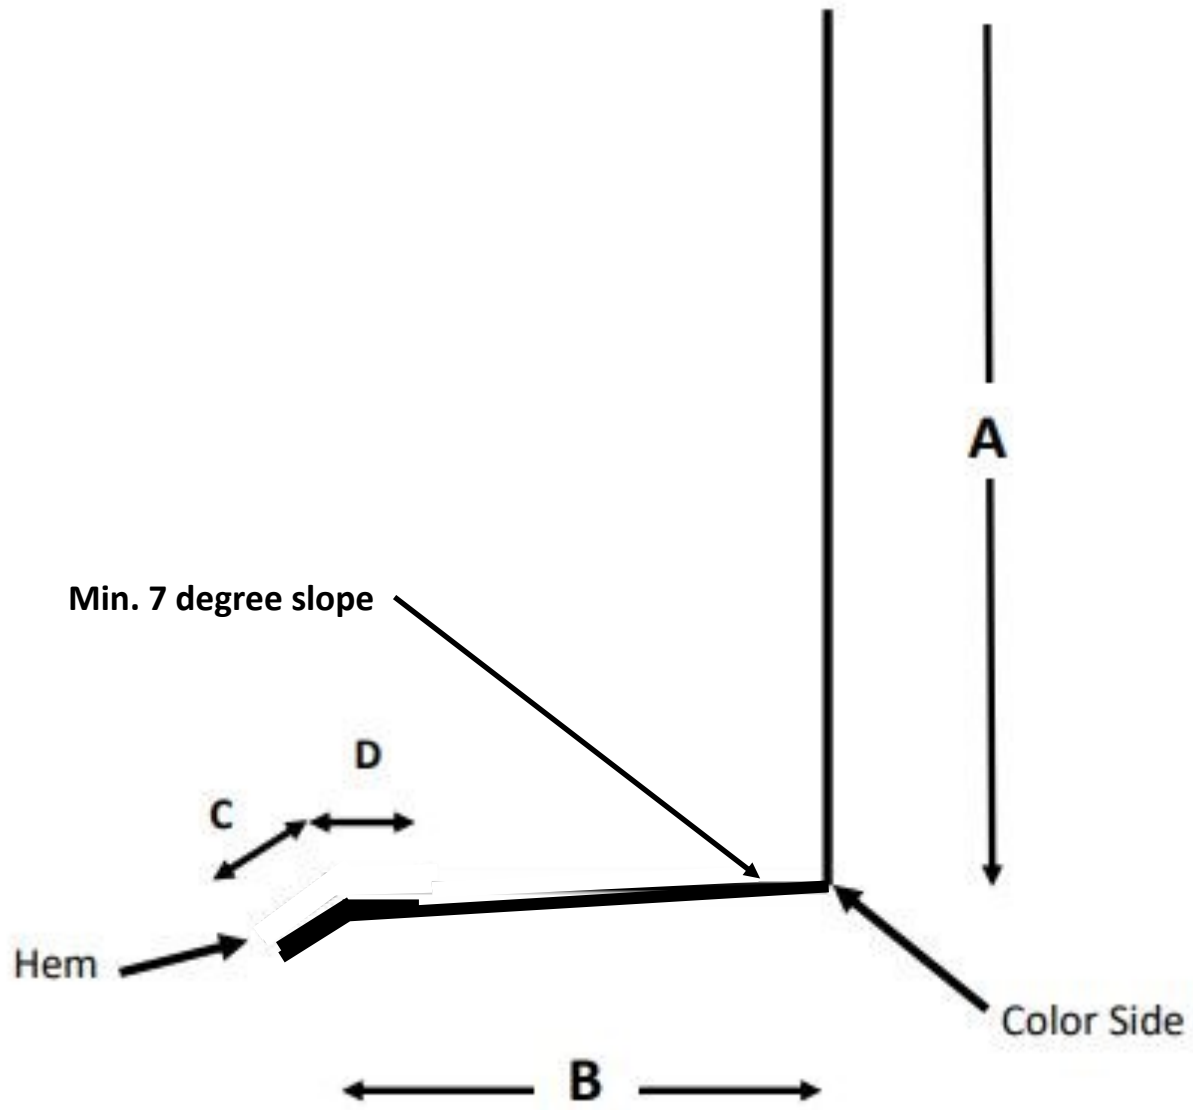


<u>Foam Thickness</u>	<u>Porcelain</u> +/- 1"	<u>"A"</u> -	<u>"B"</u> <u>I.D.</u>	<u>"C"</u>	<u>"D"</u>
2"	8mm	4"	2.375	1/2"	1/2"
3"	8mm	3"	3.375	1/2"	1/2"
4"	8mm	3"	4.375	1/2"	1/2"

Flashing Material: Minimum 26 gauge galvanized, 0.030 Aluminum or 0.030 stainless steel as specified by the architect.

MBT - (Insert Dim. B)


Below Window/Door/Penetration Flashings

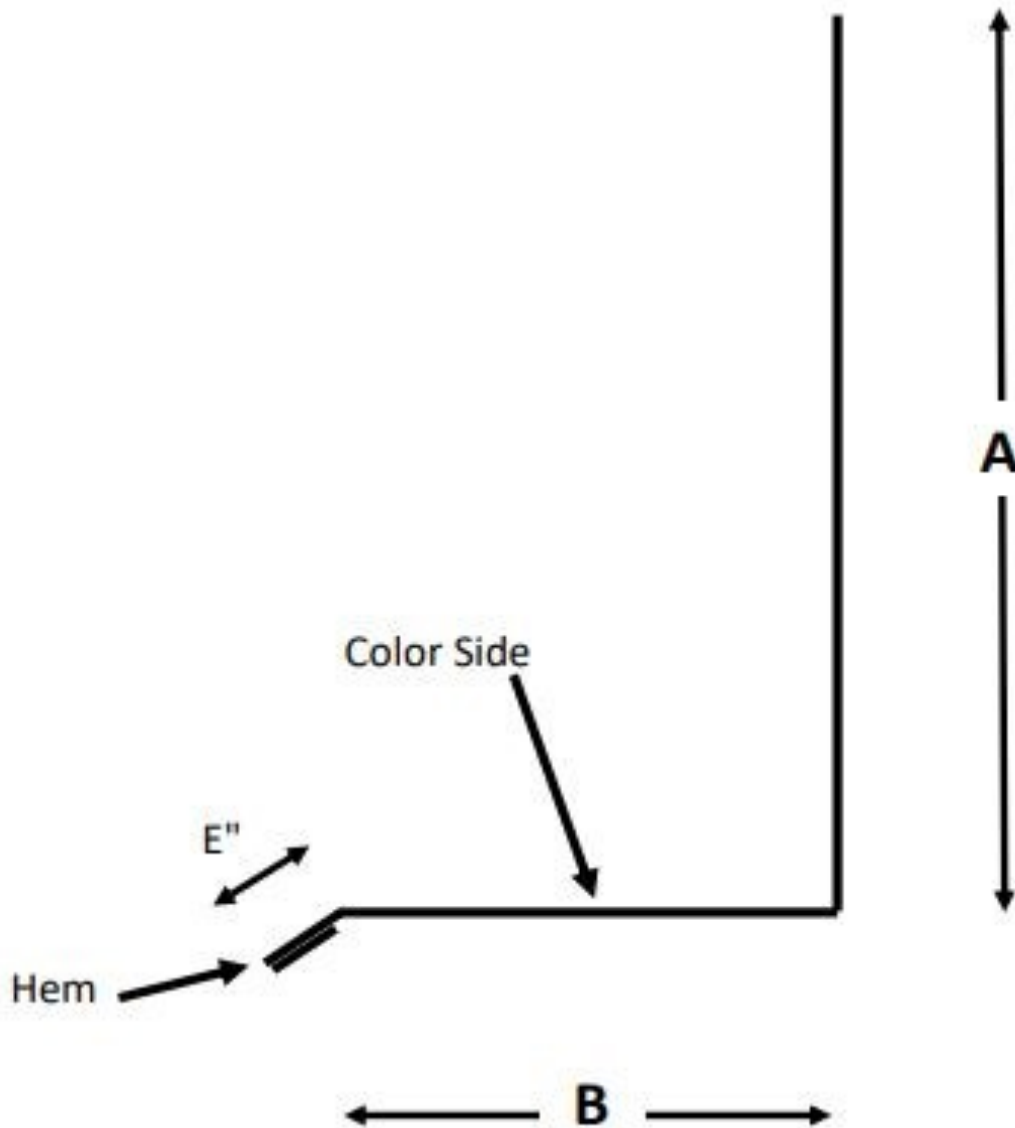

<u>Foam Thickness</u>	<u>Porcelain</u>	<u>"A"</u>	<u>"B"</u>	<u>E</u>	<u>Hem</u>
2"	8mm	4"	2.375	3/4"	1/2"
3"	8mm	3"	3.375	3/4"	1/2"
4"	8mm	3"	4.375	3/4"	1/2"

Flashing Material: Minimum 26 gauge galvanized, 0.030 Aluminum or 0.030 stainless steel as specified by the architect.

MCT - OSC Outside Corner Flashing
Same on All Foam Thicknesses

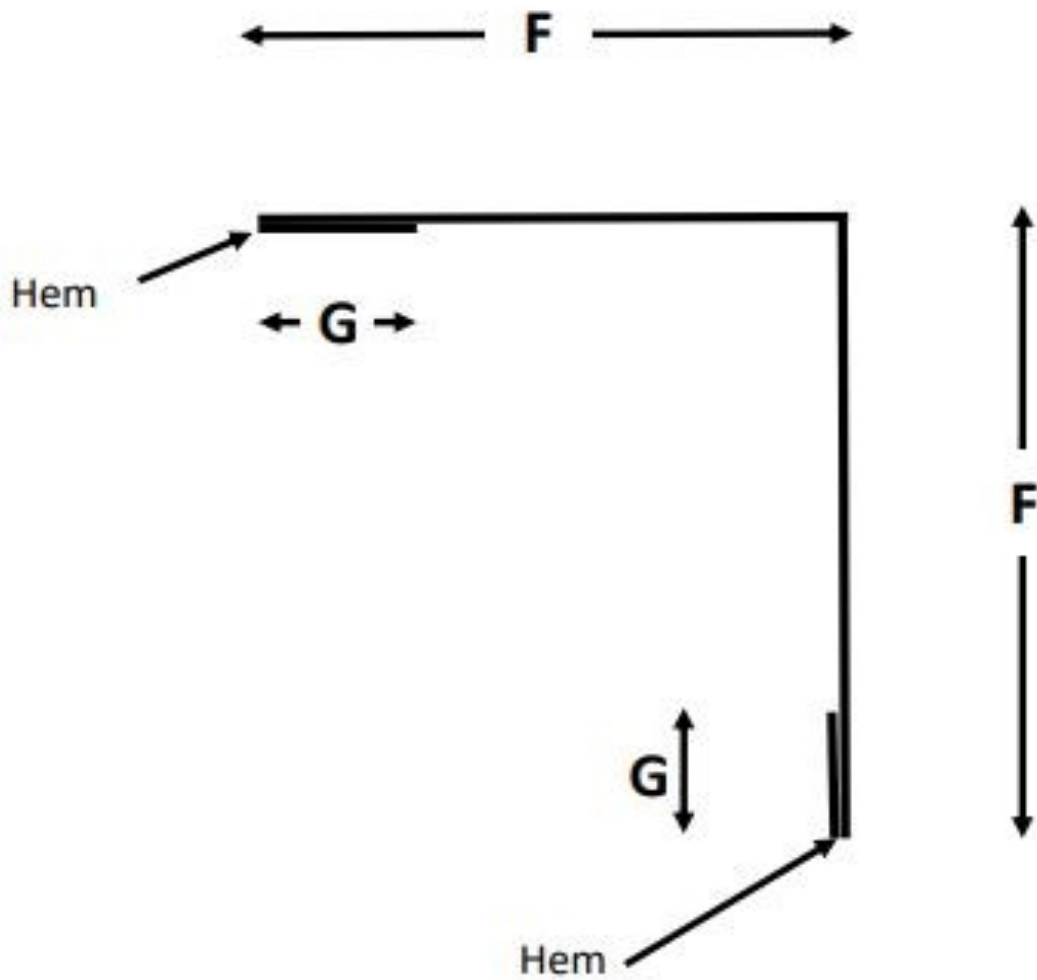

<u>Foam Thickness</u>	<u>Porcelain</u> +/- 1"	<u>F</u>	<u>G</u>		<u>Hem</u>
N/A	8mm	1"	3/4"		1/2"
N/A	8mm				
N/A	8mm				

Note: Fits all foam thickness

Flashing Material: Minimum 26 gauge galvanized, 0.030 Aluminum or 0.030 stainless steel as specified by the architect.